



Single Skin Partitioning System

Our Single Skin Partitioning System is an integrated single skin steel partition system suitable for a wide range of applications, including offices, storage areas, factory dividing walls and protecting products, property and people.

The system is quick and easy to construct and has a wide range of single, double and sliding doors available. These can be fitted with most types of locks and latches. Single Skin glazed panels are fitted with laminated safety glass during the manufacturing process, ensuring an exact fit and saving installation time on site.

The panels are bolted to the floor which means it has the added benefit of being de-mountable and re-locatable with a minimum of effort. The Single Skin standard range comes in a wide variety of width options; however standard configurations do not always fit into required spaces, therefore the non-standard or bespoke design is always an option. This system is also available in various vertical configurations - all solid, solid/glass/solid and solid/mesh.

Key Features



Suitable for a wide range of applications



Flexible configurations



Demountable & relocatable



Comprehensive door options



Quick & easy construction



Powder coated



Standard & bespoke panel options available



Ceiling solutions




Robust & durable

 h-racks.co.uk

 sales@h-racks.co.uk

 07969 439035 / 01420 768875



h-racks.co.uk

H-Racks Limited
Unit B
Willis Lane Business Park
Willis Lane, Four Marks
Hampshire
GU34 5AP

Materials

The panels are manufactured from cold rolled mild steel angle and cold rolled tees with sheet steel, spot welded together or glazing. Panels are bolted together using M8 bolts and floor fixed with pan head screws in 6mm plastic plugs.

Support mullions are manufactured from rectangular hollow section with a 8mm thick base-plate welded to the base of the mullion for floor fixing. Each mullion has a series of drilled and tapped holes along its height ready to receive M8 fixing bolts to position the panels. All mullions are floor fixed with 12mm anchor bolts. The top edges of the panels are aligned with the top cap which is manufactured from a channel section and is generally 3.66m long.

More Information

Sections

- Top & Bottom Angle: 42 x 38 x 1.5mm
- Side Angle: 40 x 40 x 1.5mm
- Dado Tees: 42 x 32 x 0.7mm
- Dado Height: 1220mm
- Sheet Steel: 0.8mm. CR
- Standard Panel Widths: 1220mm, 915mm, 610mm and 305mm
- Mullions: 80 x 40 x 3mm. RHS
- Corner Mullions: 40 x 40 x 3mm. SHS
- Standard Heights: 2.44m, 3.05m and 3.66m

Paint Finish


Electrostatically applied powder coated finish in the following standard colours:

- Grey BS00A05
- Graphite RAL7016
- Black RAL9005
- White RAL9010
- Yellow RAL1018

With other colours available as an optional extra.

Doors & Glazing

- Single Doors: 915mm wide x 1980mm high
- Double Doors: 1806mm wide x 1980mm high
- Door Fittings: 3 Lever locks with aluminium furniture
- Double doors include shoot bolts
- Sliding Doors: Sizes as above except furniture
- Sliding doors are pad-lockable using a hasp & staple or claw lock
- Glazing: 6.4mm laminated safety glass set in steel glazing bead.

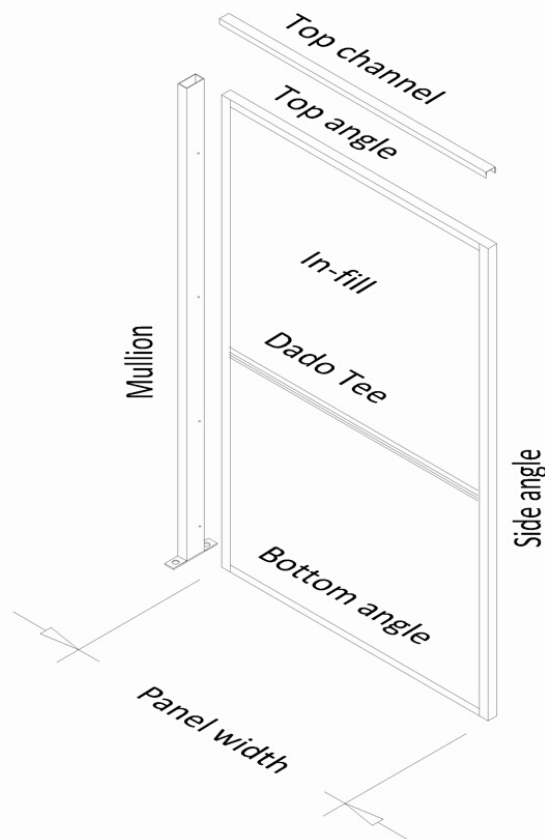

Product Specification

How the System Works

Our single skin partitioning system is constructed in a formation of panels, support mullions and top capping. The support mullions are positioned at a maximum of 3.7m centres with generally 3 standard panels between and a single top cap connecting the 3 panels together. Once all of these components are bolted together they provide a rigid partition wall up to 3.66m high. Double lift applications above 3.66m are available.


For more information contact us on the details below.



 h-racks.co.uk

 sales@h-racks.co.uk

 07969 439035 / 01420 768875



h-racks.co.uk

H-Racks Limited
Unit B
Willis Lane Business Park
Willis Lane, Four Marks
Hampshire
GU34 5AP