



Mesh Partitioning System

Our Mesh Partitioning System is an integrated partition system suitable for a wide range of applications such as storage areas, dividing work areas and protecting products, property & people.

The system is quick and easy to construct and has a comprehensive range of single, double and sliding doors available. These can be fitted with most types of locks and latches.

The panels are bolted to the floor which means it has the added benefit of being de-mountable and re-locatable with a minimum of effort. Our standard range comes in a wide variety of width options; however standard configurations do not always fit into required spaces, therefore the non-standard or bespoke design is always an option.

Key Features



Suitable for storage areas



Protection



Demountable & relocatable



Comprehensive door options



Quick & easy construction



Powder coated or Galvanised



Standard & bespoke panel options available



Ceiling solutions



Robust & durable




h-racks.co.uk



sales@h-racks.co.uk



07969 439035 / 01420 768875



h-racks.co.uk

H-Racks Limited
Unit B
Willis Lane Business Park
Willis Lane, Four Marks
Hampshire
GU34 5AP

Materials

The panels are manufactured from cold rolled mild steel angle and cold rolled tees, weld mesh in-fill sheets spot welded together. Panels are bolted together using M8 bolts and floor fixed with pan head screws in 6mm plastic plugs.

Support mullions are manufactured from rectangular hollow section with a 8mm thick base-plate welded to the base of the mullion for floor fixing. Each mullion has a series of drilled and tapped holes along its height ready to receive M8 fixing bolts to position the panels. All mullions are floor fixed with 12mm anchor bolts. The top edges of the panels are aligned with the top cap which is manufactured from a channel section and is generally 3.66m long.

More Information

Sections

- Top & Bottom Angle: 42 x 38 x 1.5mm
- Side Angle: 40 x 40 x 1.5mm
- Dado Tees: 42 x 32 x 0.7mm
- Dado Height: 1220mm
- Weld Mesh: 50 x 50 x 10swg or 25 x 25 x 12swg
- Standard Panel Widths: 1220mm, 915mm, 610mm and 305mm.
- Mullions: 80 x 40 x 3mm.
- RHS Corner Mullions: 40 x 40 x 3mm.
- SHS Standard Heights: 2.44m, 3.05m and 3.66m

Paint Finish


Electrostatically applied powder coated finish in the following standard colours:

- Grey BS00A05
- Graphite RAL7016
- Black RAL9005
- White RAL9010
- Yellow RAL1018

With other colours available as an optional extra.

Doors & Glazing

- Single Doors: 915mm wide x 1980mm high
- Double Doors: 1806mm wide x 1980mm high
- Door Fittings: 3 Lever locks with aluminium furniture
- Double doors include shoot bolts
- Sliding Doors: Sizes as above except furniture
- Sliding doors are pad-lockable using a hasp & staple or claw lock

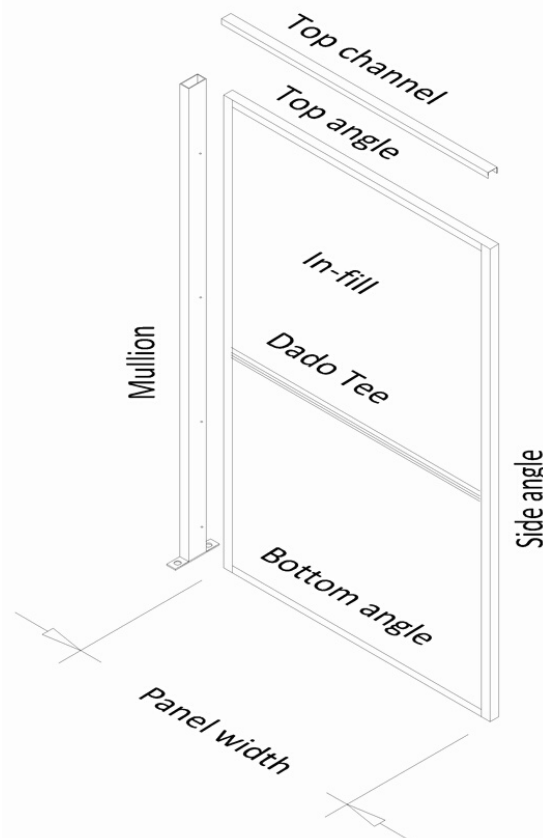

Product Specification

How the System Works

Our mesh partitioning system is constructed in a formation of panels, support mullions and top capping. The support mullions are positioned at a maximum of 3.7m centres with generally 3 standard panels between and a single top cap connecting the 3 panels together. Once all of these components are bolted together they provide a rigid partition wall up to 3.66m high. Double lift applications above 3.66m are available - please contact our sales team for further information.


For more information contact us on the details below.



 h-racks.co.uk

 sales@h-racks.co.uk

 07969 439035 / 01420 768875



h-racks.co.uk

H-Racks Limited
Unit B
Willis Lane Business Park
Willis Lane, Four Marks
Hampshire
GU34 5AP